






Ball Check Valves with PFA/FEP or PVDF lining as well as metallic design

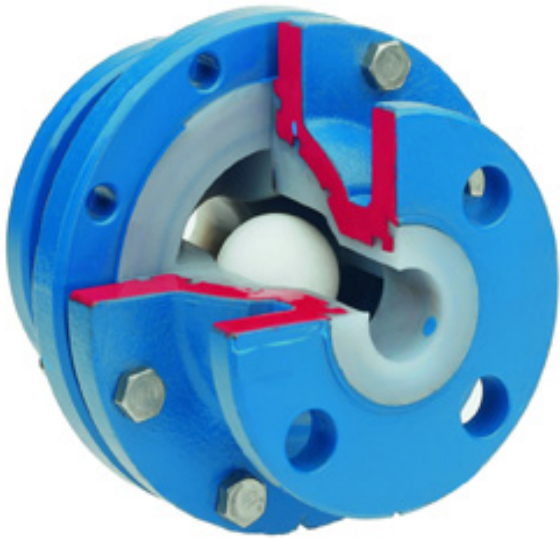

Type "GLOBUS"



Type "DELTA SG"



Type "GLOBUS"

■ Ball Check Valve

Ball Check Valves are in different designs with PFA/FEP or PVDF-lining as well as metallic design available.

■ Type "DELTA"


- with Borosilikat sightglass (DELTA SG)
- heating jacket on request
- PFA/FEP- oder PVDF-lined
- Temperature T_{max} = 423K (150°C)

■ Type "MRV" metallic design


- Materials: WCB/GS-C25, 1.4408, others on request
- heating jacket
- with sightglass on request
- Temperature T_{max} = 453K (180°C)

■ Type "GLOBUS"

- PFA/FEP- or PVDF-lined
- with DURAN-sightglass (GLOBUS-SG)



Type "GLOBUS
SG"



Type "MRV"

[index](#)



- Temperature $T_{max} = 423K (150^{\circ}C)$ or $403K (130^{\circ}C)$ for GLOBUS-SG

■ **Nominal Sizes**

- DN15 - DN150

■ **Nominal Pressure**

- PN10 - PN40

If you require more information or you have any questions about technical details please contact us [here](#) and order our catalogue.